

# METRIC FELT COMPANY


## T E C H N I C A L      D A T A

### A915-2PT (Part # PT1516B) ANTI-SQUEAK 1.5mm FLOCKED FABRIC PSA

#### DESCRIPTION

A915-2PT is a high quality flocked fabric designed for demanding automotive interior anti-squeak applications. A915-2PT is coated with a heavy mass of high performance acrylic adhesive, which exhibits excellent adhesion to a wide variety of substrates and has resistance to heat, humidity, solvents and mild plasticizers. The flocked fabric was specifically designed to meet the performance requirements for Ford ESB-M6G17-A and GM 6420M.

#### TAPE CONSTRUCTION

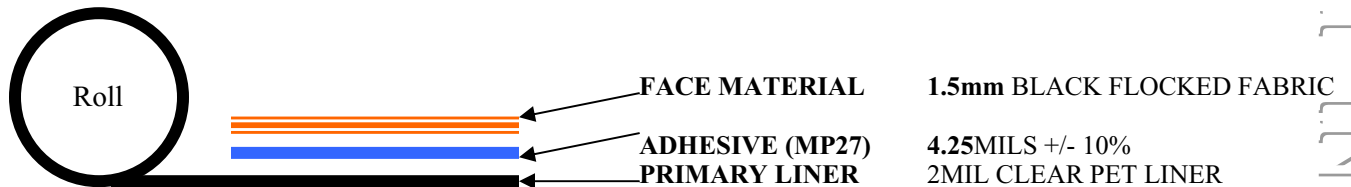

#### TYPICAL ADHESIVE PERFORMANCE DATA

##### **PEEL ADHESION (PSTC-101)**

15 MINUTE APPLIED (oz./in.)	60	-80
24 HOUR APPLIED (oz./in.)	80	-90

##### **SHEAR ADHESION (PSTC-107)**

1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours)	24+
--	-----

##### **THICKNESS TOLERANCE**

Flock material	59.05Mil +/- 5%
Adhesive	4.25Mil +/-10%
Total	63.3 Nominal

<b>MINIMUM APPLICATION TEMPERATURE</b>	50 DEGREES F
--	--------------

**NOTE:** Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

**DATE:** 3/1/06 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.