

# METRIC FELT COMPANY

T E C H N I C A L      D A T A


## DLA-504-14PT/1.5PT (Part # 2073sl)

### DOUBLE LINER SUPPORTED LAMINATING ADHESIVE

#### DESCRIPTION

DLA-504-14PT/1.5PT is a polyester supported, high performance, acrylic laminating adhesive designed for wrap-around fabricating applications where high temperature resistance is required. DLA-504-14PT/1.5PT exhibits high tack and peel adhesion and excellent high temperature holding power. It is resistant to heat, humidity, most plasticizers and mild solvents. DLA-504-14PT/1.5PT is recommended for use on low surface energy plastics such as polypropylene and, as with all high performance applications, thorough testing is required prior to use.

#### TAPE CONSTRUCTION

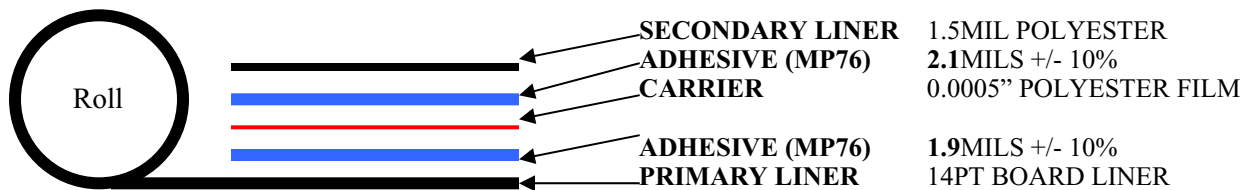

#### TYPICAL ADHESIVE PERFORMANCE DATA

PEEL ADHESION (PSTC-101)	LINER SIDE		UNWIND SIDE	
15 MINUTE APPLIED (oz./in.)	60	-70	70	-80
24 HOUR APPLIED (oz./in.)	70	-80	85	-95

SHEAR ADHESION (PSTC-107) 1" X 1", 1,000 GRAMS, 72 DEGREES F (Hours)	24+	24+
---	-----	-----

MINIMUM APPLICATION TEMPERATURE 50 DEGREES F

#### NO LOAD APPLIED, SERVICE TEMPERATURE RANGE

-45 TO 250 DEGREES F CONTINUOUS (Days, Weeks)  
-65 TO 300 DEGREES F SHORT TERM (Minutes, Hours)

**NOTE:** Performance data indicates average production values from stainless steel and should not be used for minimum specification values. It is required that the converter determines suitability of tape prior to use.

**DATE:** 9/1/04 igc

The information contained herein is to the best of our knowledge and belief, accurate. However, since the conditions of handling and of use are beyond our control, we make no guarantee of results and assume no liability for damages incurred by following these suggestions. Nothing contained herein is to be construed as a recommendation for use in violation of any patents or of applicable laws or regulations.

Metric Felt Company, 10201 191st Street, Mokena, Illinois 60448  
TEL: 708-479-7979 FAX: 708-479-4177  
info@metricfelt.com

DLA-504-14PT/1.5PT INDUSTRIAL